



BRIGHT LED ELECTRONICS CORP.

SINCE 1981

Specification for Approval

- DEVICE NUMBER: BL-H3ZD32L(PINK)

SAMPLES
ATTACHED AREA

PAGE DATE	1	2	3	4	5	6	7	8	9	10			CONTENTS
2012/9/27	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			Initial Released
2012/12/28	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1			Modify Iv
2013/2/16	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2			Modify IV
2013/3/6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3			Modify VF
2014/11/18	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4			Modify IV
2022/7/28	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0			Modify the Package Dimensions and Storage

FOR CUSTOMER'S APPROVAL STAMP OR SIGNATURE

APPROVED	PURCHASE	MANUFACTURE	QUALITY	ENGINEERING

佰鴻工業股份有限公司
BRIGHT LED ELECTRONICS CORP.
新北市板橋區和平路 19 號 3 樓
3F., No.19, He Ping Road,
Ban Qiao Dist., New Taipei City,
Taiwan
Tel: +886-2-29591090
Fax: +886-2-29547006/29558809
www.brtled.com

Approved By	Confirmed By	Prepared By
曾慶霖	毛曉峰	羅培娟


● Features:

1. Emitted Color: White
2. Lens Appearance: White diffuse.
3. 5.4x5.0x1.6mm standard package.
4. Suitable for all SMT assembly methods.
5. Compatible with infrared and vapor phase reflow solder process.
6. Compatible with automatic placement equipment.
7. This product doesn't contain restriction Substance, comply ROHS standard.

● Applications:

1. Automotive lighting.
2. Backlighting: LCDs, Key pads advertising.
3. Status indicators: Consumer & industrial electronics.
4. General use.

● Package Dimensions:

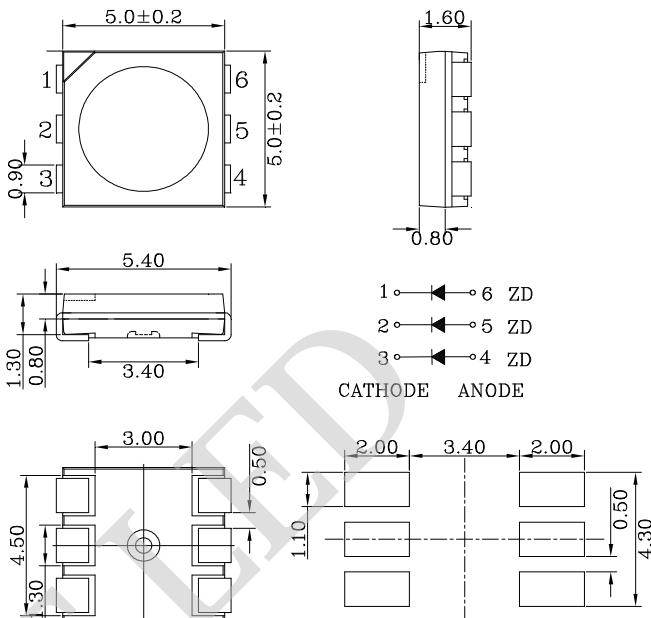

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.10\text{mm}$ ($0.004''$) unless otherwise specified.
3. Specifications are subject to change without notice.

● Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Power Dissipation ^{*1}	P_D	306	mW
Forward Current ^{*3}	I_F	90	mA
Peak Forward Current ^{*3}	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	-40~+85	°C
Storage Temperature	T_{stg}	-40~+85	°C
Soldering Temperature	T_{sol}	See Page 7	-

^{*1} The values are based on 3-circuit performance

^{*2} The values are based on 3-circuit performance

^{*3} Condition for IPP is pulse of 1/10 duty and 3 msec width







● Electrical and optical characteristics($T_a=25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage ^{*1}	V _f	I _f =20mA	-	3.0	3.4	V
Luminous Intensity ^{*3}	I _v	I _f =60mA	-	8250	-	mcd
Chromaticity Coordinates	x	I _f =60mA	-	0.405	-	-
	y		-	0.3	-	
Reverse Current	I _R	V _R =5V	-	-	10	μA
Viewing Angle	2θ _{1/2}	I _f =60mA	-	120	-	deg


*¹ The values are based on 1-circuit performance

*² The values are based on 3-circuit performance

● Typical Electro-Optical Characteristics Curves.

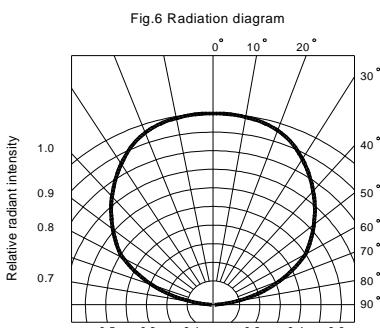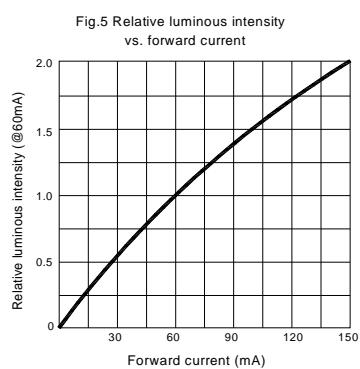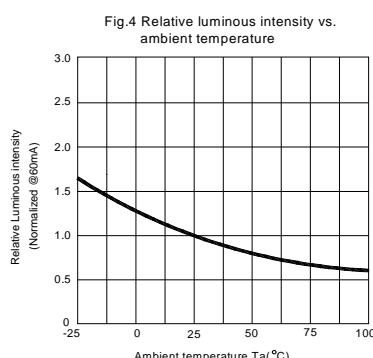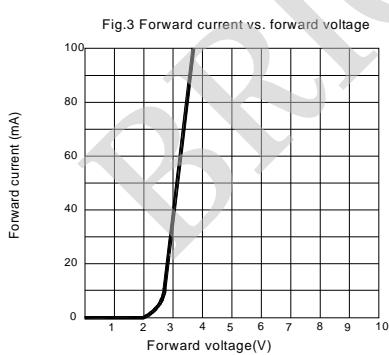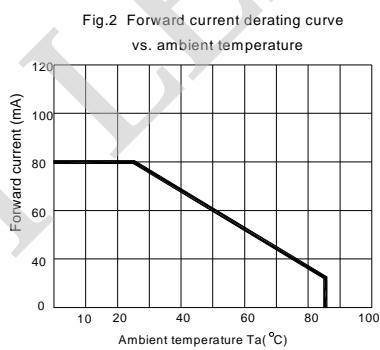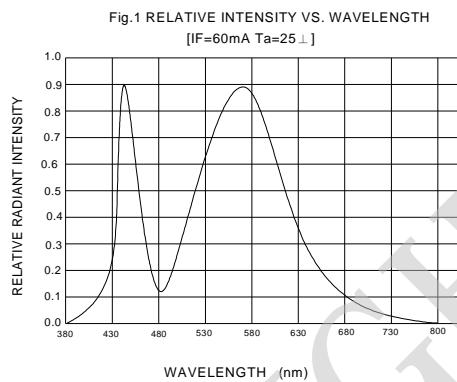


● Tapping and packaging specifications(Units: mm)

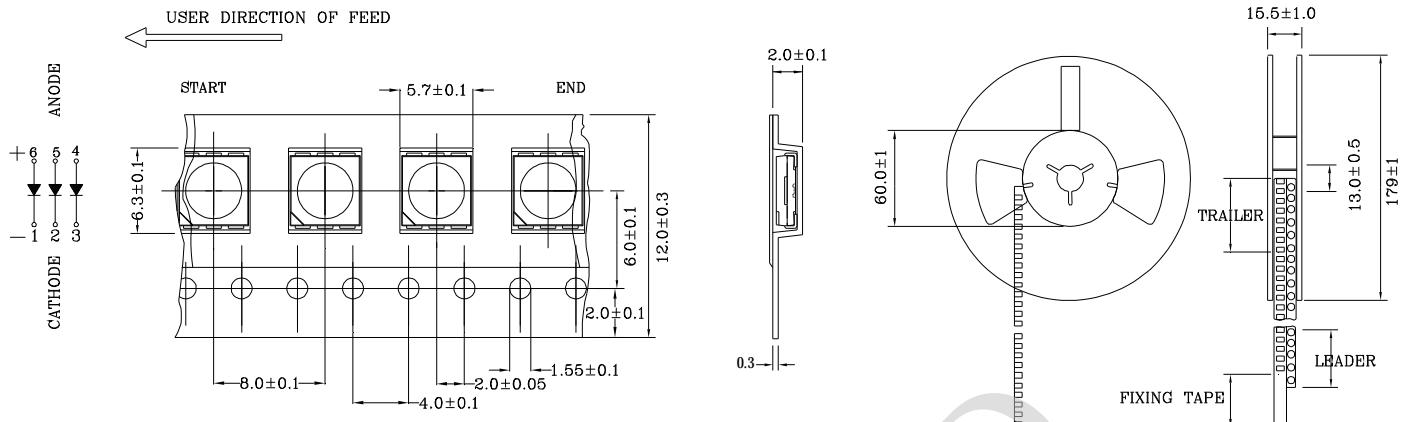

NOTE:1000 PCS PER REEL

● Package Method:(unit:mm)

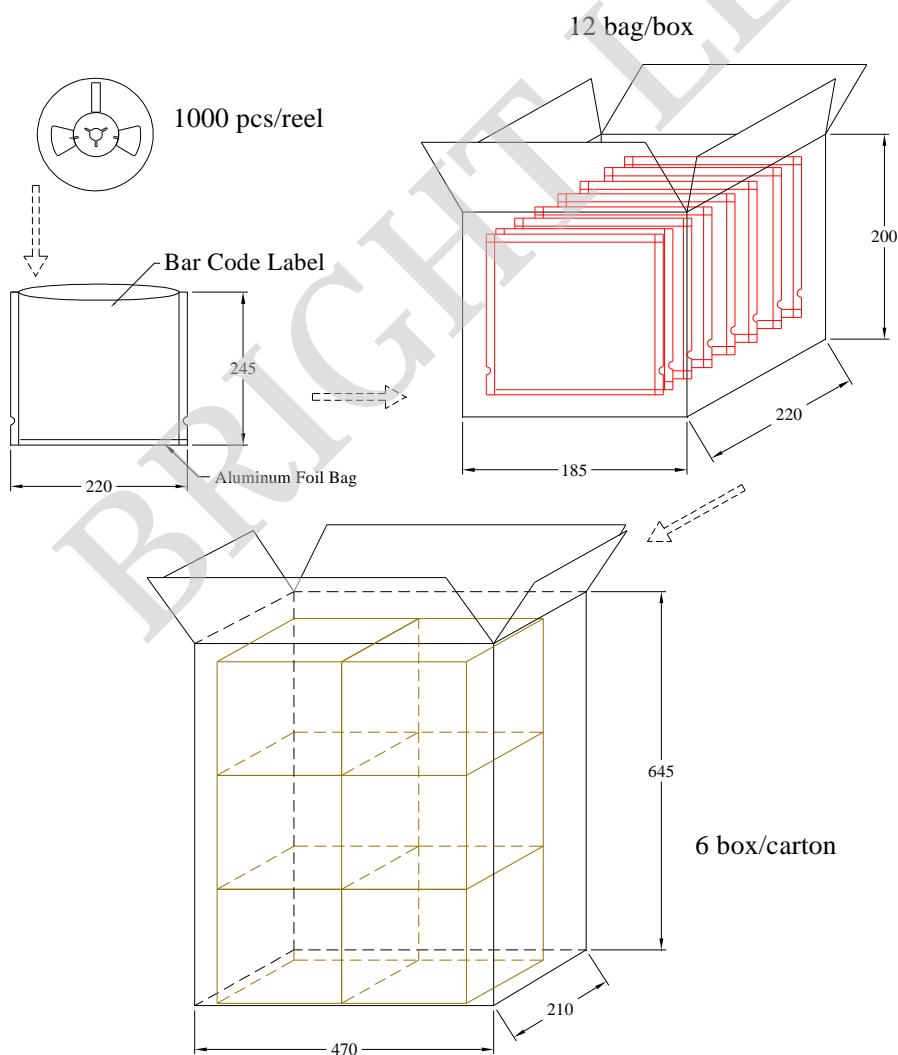

● Bin Limits

Intensity Bin Limits (At 60 mA , The values are based on 3-circuit performance)

BIN CODE	Min. (mcd)	Max. (mcd)
ZB1	7050	7350
ZB2	7350	7650
ZB3	7650	7950
ZB4	7950	8250
ZB5	8250	8550
ZB6	8550	8850
ZB7	8850	9150
ZB8	9150	9450

Tolerance for each Bin limit is ±10%


Forward Voltage Bin Limits (At 60 mA, The values are based on 3-circuit performance)

BIN CODE	Min. (v)	Max. (v)
G1	2.8	2.9
G2	2.9	3.0
H1	3.0	3.1
H2	3.1	3.2
J1	3.2	3.3
J2	3.3	3.4

Tolerance for each Bin limit is ±0.05V

Color Bin Limits (At 60 mA)

C.I.E CHROMATICITY DIAGRAM

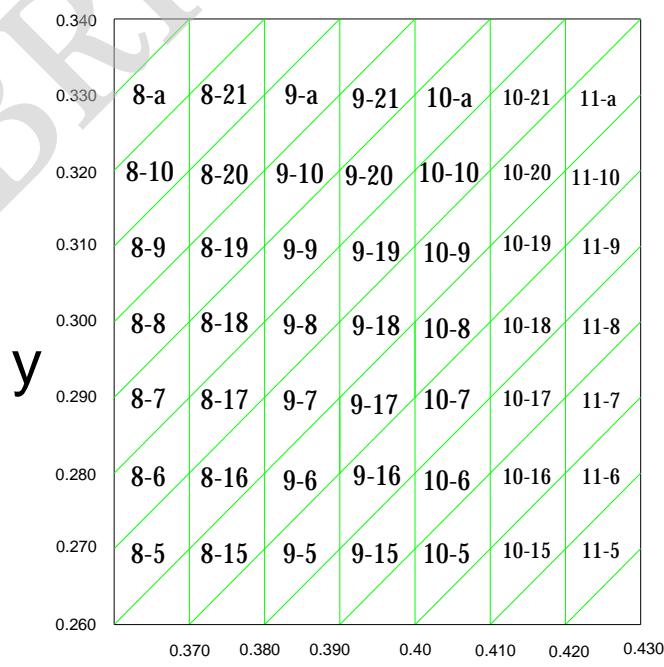


Color Bin Limits (At 60mA)

CCT	BIN	Chromaticity Coordinates			
2500K 以上	8-5	x	0.36	0.37	0.37
		y	0.26	0.27	0.28
8-6	x	0.36	0.37	0.37	0.36
	y	0.27	0.28	0.29	0.28
8-7	x	0.36	0.37	0.37	0.36
	y	0.28	0.29	0.30	0.29
8-8	x	0.36	0.37	0.37	0.36
	y	0.29	0.30	0.31	0.30
8-9	x	0.36	0.37	0.37	0.36
	y	0.30	0.31	0.32	0.31
8-10	x	0.36	0.37	0.37	0.36
	y	0.31	0.32	0.33	0.32
8-a	x	0.36	0.37	0.37	0.36
	y	0.32	0.33	0.34	0.33
8-15	x	0.37	0.38	0.38	0.37
	y	0.26	0.27	0.28	0.27
8-16	x	0.37	0.38	0.38	0.37
	y	0.27	0.28	0.29	0.28
8-17	x	0.37	0.38	0.38	0.37
	y	0.28	0.29	0.30	0.29
8-18	x	0.37	0.38	0.38	0.37
	y	0.29	0.30	0.31	0.30
8-19	x	0.37	0.38	0.38	0.37
	y	0.30	0.31	0.32	0.31
8-20	x	0.37	0.38	0.38	0.37
	y	0.31	0.32	0.33	0.32
8-21	x	0.37	0.38	0.38	0.37
	y	0.32	0.33	0.34	0.33
9-5	x	0.38	0.39	0.39	0.38
	y	0.26	0.27	0.28	0.27
9-6	x	0.38	0.39	0.39	0.38
	y	0.27	0.28	0.29	0.28
9-7	x	0.38	0.39	0.39	0.38
	y	0.28	0.29	0.30	0.29
9-8	x	0.38	0.39	0.39	0.38
	y	0.29	0.30	0.31	0.30
9-9	x	0.38	0.39	0.39	0.38
	y	0.30	0.31	0.32	0.31
9-10	x	0.38	0.39	0.39	0.38
	y	0.31	0.32	0.33	0.32
9-a	x	0.38	0.39	0.39	0.38
	y	0.32	0.33	0.34	0.33
9-15	x	0.39	0.40	0.40	0.39
	y	0.26	0.27	0.28	0.27
9-16	x	0.39	0.40	0.40	0.39
	y	0.27	0.28	0.29	0.28
9-17	x	0.39	0.40	0.40	0.39
	y	0.28	0.29	0.30	0.29
9-18	x	0.39	0.40	0.40	0.39
	y	0.29	0.30	0.31	0.30
9-19	x	0.39	0.40	0.40	0.39
	y	0.30	0.31	0.32	0.31

9-20	x	0.39	0.40	0.40	0.39
	y	0.31	0.32	0.33	0.32
9-21	x	0.39	0.40	0.40	0.39
	y	0.32	0.33	0.34	0.33
10-5	x	0.40	0.41	0.41	0.40
	y	0.26	0.27	0.28	0.27
10-6	x	0.40	0.41	0.41	0.40
	y	0.27	0.28	0.29	0.28
10-7	x	0.40	0.41	0.41	0.40
	y	0.28	0.29	0.30	0.29
10-8	x	0.40	0.41	0.41	0.40
	y	0.29	0.30	0.31	0.30
10-9	x	0.40	0.41	0.41	0.40
	y	0.30	0.31	0.32	0.31
10-10	x	0.40	0.41	0.41	0.40
	y	0.31	0.32	0.33	0.32
10-a	x	0.40	0.41	0.41	0.40
	y	0.32	0.33	0.34	0.33
10-15	x	0.41	0.42	0.42	0.41
	y	0.26	0.27	0.28	0.27
10-16	x	0.41	0.42	0.42	0.41
	y	0.27	0.28	0.29	0.28
10-17	x	0.41	0.42	0.42	0.41
	y	0.28	0.29	0.30	0.29
10-18	x	0.41	0.42	0.42	0.41
	y	0.29	0.30	0.31	0.30
10-19	x	0.41	0.42	0.42	0.41
	y	0.30	0.31	0.32	0.31
10-20	x	0.41	0.42	0.42	0.41
	y	0.31	0.32	0.33	0.32
10-21	x	0.41	0.42	0.42	0.41
	y	0.32	0.33	0.34	0.33
11-5	x	0.42	0.43	0.43	0.42
	y	0.26	0.27	0.28	0.27
11-6	x	0.42	0.43	0.43	0.42
	y	0.27	0.28	0.29	0.28
11-7	x	0.42	0.43	0.43	0.42
	y	0.28	0.29	0.30	0.29
11-8	x	0.42	0.43	0.43	0.42
	y	0.29	0.30	0.31	0.30
11-9	x	0.42	0.43	0.43	0.42
	y	0.30	0.31	0.32	0.31
11-10	x	0.42	0.43	0.43	0.42
	y	0.31	0.32	0.33	0.32
11-a	x	0.42	0.43	0.43	0.42
	y	0.32	0.33	0.34	0.33

CCT : Tolerance for each Bin limit is $\pm 100K$

● BIN : X X X

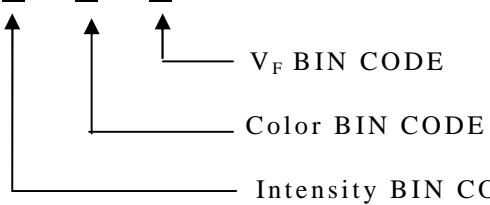

● Reliability Test

Classification	Test Item	Reference Standard	Test Conditions	Result
Endurance Test	Operation Life	MIL-STD-750:1026 MIL-STD-883:1005 JIS-C-7021 :B-1	I _F =60mA Ta=Under room temperature Test time=1,000hrs	0/20
	High Temperature High Humidity Storage	MIL-STD-202:103B JIS-C-7021 :B-11	Ta=+65°C±5°C RH=90%-95% Test time=240hrs	0/20
	High Temperature Storage	MIL-STD-883:1008 JIS-C-7021 :B-10	High Ta=+85°C±5°C Test time=1,000hrs	0/20
	Low Temperature Storage	JIS-C-7021 :B-12	Low Ta=-35°C±5°C Test time=1,000hrs	0/20
Environmental Test	Temperature Cycling	MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS-C-7021 :A-4	-35°C ~ +25°C ~ +85°C ~ +25°C 60min 20min 60min 20min Test Time=5cycle	0/20
	Thermal Shock	MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1011	-35°C±5°C ~+85°C±5°C 20min 20min Test Time=10cycle	0/20
	Solder Resistance	MIL-STD-202:201A MIL-STD-750:2031 JIS-C-7021 :A-1	Preheating : 140°C-160°C, within 2 minutes. Operation heating : 260°C (Max.), within 10seconds. (Max.)	0/20


● Judgment criteria of failure for the reliability

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	V _F (V)	I _F =60mA	Over U ¹ x1.2
Reverse current	I _R (uA)	V _R =5V	Over U ¹ x2
Luminous intensity	I _v (mcd)	I _F =60mA	Below S ¹ X0.5

Note: 1. U means the upper limit of specified characteristics. S means initial value.

2. After each test, remove test pieces, wait for 2 hours and test pieces have returned to ambient temperature, then take next measurement.

● IR-Reflow

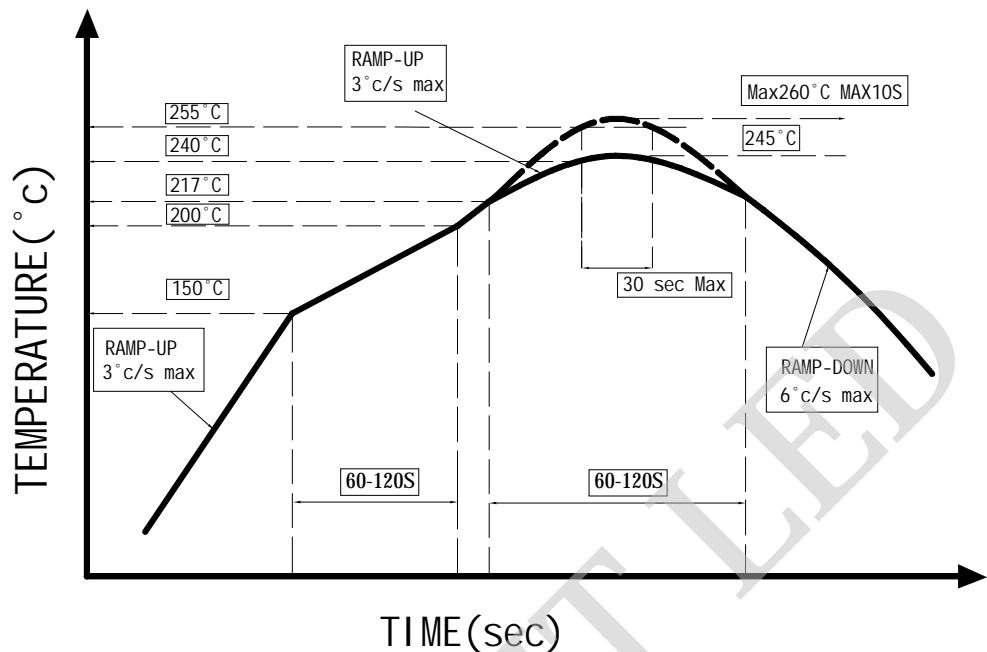

- 1、Avoid any external stress applied to the resin while the LEDs are at high temperature, especially during soldering.
- 2、Avoid rapid cooling or any excess vibration during temperature ramp-down process
- 3、Although the soldering condition is recommended above,
soldering at the lowest possible temperature is feasible for the LEDs

● IRON Soldering

350°C Within 3 sec, one time only.


● Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible.


Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools.
(pic.1)
2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry. (pic.2, pic.3)
3. Do not stack together assembled PCBs, containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry. (pic.4)
4. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible. (pic.5)
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup. (pic.5)
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production. (pic.5)




Pic.1




Pic.2



Pic.3



Pic.4

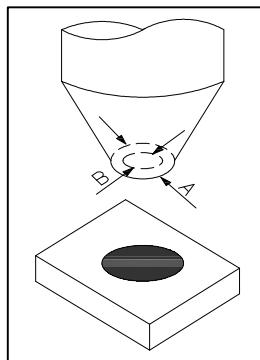

Pic.5

● Notes for designing:

Care must be taken to provide the current limiting resistor in the circuit so as to drive the LEDs within the rated figures. Also, caution should be taken not to overload LEDs with instantaneous voltage at the turning ON and OFF of the circuit.

When using the pulse drive care must be taken to keep the average current within the rated figures. Also, the circuit should be designed so as be subjected to reverse voltage when turning off the LEDs.

● Storage:

In order to avoid the absorption of moisture, it is recommended to solder LEDs as soon as possible after unpacking the sealed envelope.

If the envelope is still packed, to store it in the environment as following:

(1) Temperature : 5°C-30°C (41°F) Humidity : RH 60% Max.

(2) After this bag is opened, devices that will be applied to infrared reflow, vapor-phase reflow, or equivalent soldering process must be:

- a. Completed within 24 hours.
- b. Stored at less than 20% RH.

(3) Devices require baking before mounting, if:

2a or 2b is not met.

(4) If baking is required, devices must be baked under below conditions:

48 hours at 60°C±5°C.

● Package and Label of Products:

(1) Package: Products are packed in one bag of 1000 pcs (one taping reel) and a label is attached on each bag.

(2) Label:

